


# Digital Delay Timer



This unit maintains power to auxiliary equipment after ignition has been disconnected for a user defined programmed length of time.

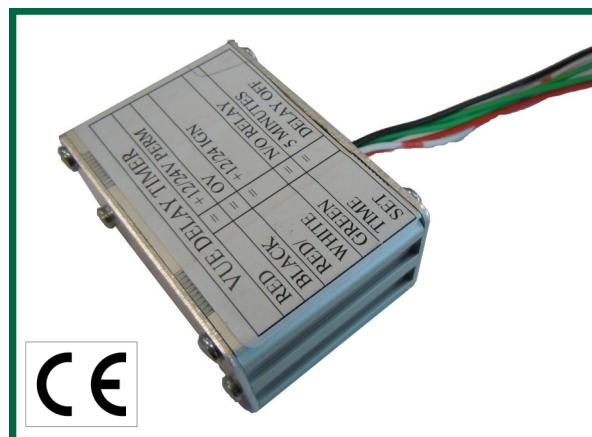

VUEDELTIMER

Input Voltage	DC 12V—24V
Dimensions	63mm(W) x 45mm (L) x 30mm (H)
Weight	88g ( approx )
User Inputs	DC 12 - 24V 1 x Ignition Input 1 x Permanent Battery Power Feed
User Outputs	1 x Changeover Relay Outputs, Volts Free
Timer	Software Programmable
Delay Off Timer	Standby 10mA Triggered 80mA
Relay Load Max Current	5amp